



# FLAT DISCS



Copper Carbide Design

## COPPER

FD Ø 200 x 2 mm, AH 22 mm	Ø 8"	Art. No: 132112-xx
FD Ø 175 x 2 mm, AH 22 mm	Ø 7"	Art. No: 132111-xx
FD Ø 175 x 2 mm, AH 22 mm, Vented	Ø 7"	Art. No: 132117-xx (Grit 14-46 only)
FD Ø 125 x 2 mm, AH 22 mm	Ø 5"	Art. No: 132110-xx
FD Ø 115 x 2.5 mm, AH 22 mm	Ø 4 5/8"	Art. No: 132114-xx
HD Ø 115 x 2.5 mm, AH 22 mm	Ø 4 5/8"	Art. No: 132114-OG
FD Ø 102 x 1.5 mm, AH 22 mm	Ø 4"	Art. No: 132109-xx



FD Ø 175 x 2 mm, Ø 7"

FD Ø 175 x 2 mm, Ø 7",  
Vented, Grit 18

Various Flat Discs with AH 22 mm

### COPPER FLAT DISCS ARE THE STANDARD TOOL FOR:


OTR sidewall buffing | Large repairs | Conveyor belt repair | Conveyor belt preparation (removal of vulcanizing skin for the application of corrugated rubber cleats) | Pre cured tread preparation | Industrial rubber sheets buffing | Horse hoof grinding (with special open grit = HD Ø 115 x 2.5 mm)



Patriot Design

## PATRIOT

FDP Ø 175 x 2.5 mm, AH 22 mm	Ø 7"	Art. No: 132400-xx
FDP Ø 125 x 2.5 mm, AH 22 mm	Ø 5"	Art. No: 132401-xx
FDP Ø 102 x 2 mm, AH 16 mm	Ø 4"	Art. No: 132402-xx

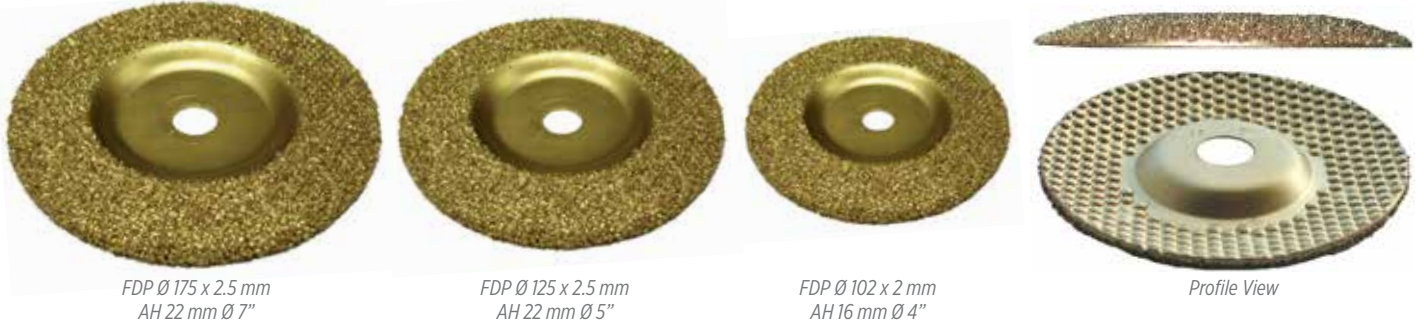

FDP Ø 175 x 2.5 mm  
AH 22 mm Ø 7"

FDP Ø 125 x 2.5 mm  
AH 22 mm Ø 5"

FDP Ø 102 x 2 mm  
AH 16 mm Ø 4"

Profile View

### PATRIOT FLAT DISCS ARE THE MOST ECONOMIC TOOLS FOR:

OTR sidewall buffing | Large repairs | Conveyor belt repair | Conveyor belt preparation (removal of vulcanizing skin for the application of corrugated rubber cleats) | Pre cured tread preparation | Industrial rubber sheets buffing

**INSIST ON THE ORIGINAL!**

**WWW.BJ-ROCKET.COM**



# FLAT DISCS



Steel Shot Grit Design

### STEEL SHOT GRIT

- FD Ø 175 x 2 mm, AH 22 mm
- FD Ø 175 x 2 mm, AH 22 mm
- FD Ø 125 x 2 mm, AH 22 mm
- FD Ø 125 x 2 mm, AH 22 mm
- FD Ø 102 x 2 mm, AH 22 mm
- FD Ø 102 x 1.5 mm, AH 22 mm

- Ø 7" Grit 230
- Ø 7" Grit 390
- Ø 5" Grit 230
- Ø 5" Grit 390
- Ø 4" Grit 230
- Ø 4" Grit 390

- Art. No: 932111-230
- Art. No: 932111-390
- Art. No: 932110-230
- Art. No: 932110-390
- Art. No: 932109-230
- Art. No: 932109-390



FD  
Ø 175 x 2 mm, AH 22 mm Ø 7"



FD  
Ø 125 x 2 mm, AH 22 mm Ø 5"



FD  
Ø 102 x 1.5 mm, AH 22 mm Ø 4"

### STEEL SHOT GRIT FLAT DISCS ARE BEST SUITED FOR SENSITIVE BUFFING JOBS:

OTR sidewall buffing | Large repairs | Conveyor belt repair | Conveyor belt preparation (removal of vulcanizing skin for the application of corrugated rubber cleats) | Pre cured tread preparation | Industrial rubber sheets buffing



Super Patriot Design

### SUPER PATRIOT

- FDSP Ø 175 x 2.5 mm, AH 22 mm
- FDSP Ø 125 x 2.5 mm, AH 22 mm

- Ø 7"
- Ø 5"

- Art. No: 133400-xxx
- Art. No: 133401-xxx



FDSP  
Ø 175 x 2.5 mm, AH 22 mm Ø 7"



FDSP  
Ø 125 x 2.5 mm, AH 22 mm Ø 5"



ALL B&J FLAT DISCS ARE PERFECT FOR REPAIRING CONVEYOR BELTS OR OTR TIRES.

INSIST ON THE ORIGINAL!

WWW.BJ-ROCKET.COM